

KLEEN-FLO

#578M UNIVERSAL FLOATING SUCTION LINE



STOP! READ THIS NOW!

Installation of this product must be done by a qualified technician familiar with oil heating systems and licensed where applicable. Service done by unqualified persons can result in hazard to that person and others.


PACKAGE CONTENTS:

QTY	DESCRIPTION
-----	-------------

- | | |
|---|-------------------------------------------------------------------------------------------------|
| 1 | 9 ft. NBR tubing with float kit attached |
| 1 | 1 hose clamp |
| 1 | 2" NPT 4-way bushing with 3/8" flare fitting, 3/8" barb fitting and 3/8" red cap (preassembled) |

INSTALLATION INSTRUCTIONS

1. Cut NBR tubing one foot longer than the height of the tank.
2. Slide hose clamp over the tubing with float kit attached.
3. Attach the barb fitting to the preassembled 2" NPT 4-way bushing.
4. Tighten the hose clamp.
5. Install finished assembly into one of the 2" openings on the oil tank.
6. Attach the 3/8" fuel line to the 3/8" flare fitting on the floating suction line.
7. If installed on a two-line system, remove the red cap; install a 3/8" flare fitting (not included) and attach the return line.
8. All threads must be checked for oil and vacuum leaks before leaving the job site.

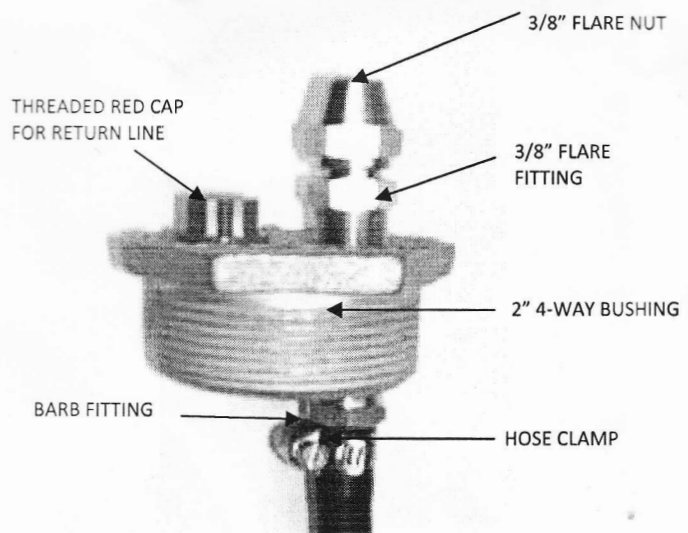

Innovative Products - Superior Performance

137 PUNCHEON CREEK DR., ANDREWS, SC 29510 (843) 264-2874

WWW.MITCOMFG.COM

578M